

12-21-99

7

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 678-405 (P8985)

First Inventor or Application Identifier Dae-Heon Kwon

Title PORTABLE TELEVISION (TV) PHONE...

Express Mail Label No. EL393563185US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)

2. ☒ Specification [Total Pages 23]
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 3]

4. Oath or Declaration [Total Pages 2]

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of
(when there is an assignee) ☐ Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 ☐ Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity ☐ Statement filed in prior application,
Statement(s) ☐ Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Paul J. Farrell				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	12/20/99

PATENT

Atty. Docket No. 678-405 (P8985)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner
for Patents
Washington, D.C. 20231

UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Dae-Heon KWON; Yang-Muk KANG; and Won-Seok KANG

For: PORTABLE TELEVISION (TV) PHONE AND METHOD FOR
CONTROLLING OPERATION THEREOF

Enclosed are:

[X] 19 page(s) of specification

[X] 1 page(s) of Abstract

[X] 3 page(s) of claims

[X] 3 sheets of drawings [X] formal ☐ informal

[X] 2 page(s) of Declaration and Power of Attorney

[X] An Assignment of the invention to Samsung Electronics Co., Ltd.

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date December 20, 1999 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL393563185US addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Tidge Holmberg

(Type or print name of person mailing paper)

(Signature of person mailing paper)

☐ This application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application(s) No(s).:

APPLICATION NO(S).:

FILING DATE

____/____/____
____/____/____

☒ Certified copy of applications

Country

Appln. No.

Filed

Korea

98-56487

December 19, 1998

Korea

99-54007

November 30, 1999

from which priority under Title 35 United States Code, § 119 is claimed
☐ is enclosed.

☒ will follow.

CALCULATION OF UTILITY APPLICATION FEE

For	Number Filed	Number Extra	Rate	Basic Fee \$760.00
TOTAL CLAIMS	7	0	x 18 =	\$0
INDEPENDENT CLAIMS	1	0	x 78 =	\$0
<input type="checkbox"/> Multiple Dep. Claim	0		260	\$0
			TOTAL \$760.00	

☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. § 1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$.

*Includes all independent and single dependent claims and all claims referred to in multiple claims. See 37 C.F.R. § 1.75(c).


☒ [X] The amount of \$40.00 for recording the attached Assignment is enclosed as a separate check.

☒ [X] Two checks in the amount of \$760.00 & \$40.00 to cover the [X] recording, [X] filing fee(s) are attached.

☐ [] Charge fee to Deposit Account No. 04-1121. Order No. _____
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

☒ [X] Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and 1.17, at any time during the pendency of this application, or credit any overpayment of such fee(s) to Deposit Account No. 04-1121. Also, in the event any extensions of time for responding are required for the pending application(s), please treat this paper as a petition to extend the time as required and charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

Date: December 20, 1999



Paul J. Farrell
Reg. No. 33,494

DILWORTH & BARRESE
333 Earle Ovington Blvd.
Uniondale, NY 11553
Tel. No. (516) 228-8484
Fax. (516) 228-8516

PORTABLE TELEVISION (TV) PHONE AND METHOD FOR CONTROLLING OPERATION THEREOF

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a hand-held portable cellular telephone, and more particularly to an integrally combined television (TV) and portable cellular phone (hereinafter, referred to as "TV phone").

2. Description of the Related Art

In recent years, rapid and widespread use of portable cellular telephones as an ordinary personal communication appliance in society has driven the desire of users toward development of the portable phone with a variety of additional functions besides making simple conversation. For example, portable phones are being developed with a calculating function, a biorhythm checking function, and other functions, including the capability of transmitting/receiving television images as well as a video camera image. The term "TV phone" herein refers to a wireless portable cellular phone which allows for watching a television (TV) broadcast program through a displaying unit in the portable phone in addition to the capability of cordless telephone conversation.

In order to receive TV broadcasts, a portable phone should be equipped with two radio frequency units. The reason for this is that a frequency

bandwidth necessary for transmitting/receiving telephony messages (i.e., audio and data) for the portable phone is different from that for a TV broadcast. The operational status of the portable TV phone is classified into a phone mode, a waiting mode, and a TV mode. The TV mode is also used both as a waiting mode and as an image-receiving mode.

Because the TV phone should allow a user to watch and hear images and audio of a television broadcast program received in the TV mode through the display unit, i.e. a Thin Film Transistor (TFT) Liquid Crystal Display (LCD), and the speaker or earphone of the TV phone, it cannot use the method employed by a general portable phone to inform a user of an incoming call or an incoming character message, while in the TV mode state.

That is, there is no method of immediately informing the user of the occurrence of an incoming call or an incoming character data message when the TV phone is being used to watch and listen to a television broadcast program.

There is therefore a need for a portable TV phone that rapidly and accurately informs a user that there is an incoming call or character data message when the user is viewing a TV broadcast program.

A TV phone is disclosed in Korean Patent Application No. 95-46026, filed on December 1, 1995 (published on July 31, 1997), entitled "A COMBINED TV RECEIVER AND CELLULAR PHONE" of LG Electronics Inc. However, the TV phone in the prior art discloses technology for controlling separately the

operations of the transmitter/receiver of the cellular phone and the TV receiver by using only a microprocessor, but no technology for processing a character message such as short message service (SMS). Also, it is impossible to switch the operational mode when an incoming call occurs during the viewing of a TV broadcast program in the TV mode. Accordingly, when an incoming call occurs during the watching of a TV, the transmitter/receiver of a cellular phone is operated separately, thereby increasing consumption of a battery, and causing inconvenience in switching of the operational mode from the TV mode to the phone mode. That is, a user suffers inconvenience having to perform a switching off of a TV and a switchover of the operational mode from the TV mode to the phone mode.

SUMMARY OF THE INVENTION

Therefore, an object of the invention is to provide a portable TV phone designed to selectively allow for transmission or reception of an audio signal, as well as reception of a TV program.

It is another object of the invention to provide a portable TV phone which effectively informs a user i.e., a called party, of the reception of any incoming call related message when the user receives the incoming call related message from a calling party.

It is another object of the invention to provide a portable TV phone which automatically activates preset incoming call alarm modes when the operational mode of the TV phone is switched from the phone mode to the TV mode.

In accordance with the preferred embodiment of the present invention, these and other objects are accomplished by providing a TV phone in which a television and a portable cellular phone are integrally combined, the TV phone comprising:

5 a TV module for receiving and demodulating a desired TV channel signal among radio-frequency electromagnetic signals received, in response to an input of a tuning signal, when the TV module operates by supply of a power supply voltage, to generate a composite video signal, a composite synchronizing signal and a composite audio signal;

10 a Mobile Station Radio Frequency Unit (hereinafter, referred to as "MRFU") for demodulating a signal indicative of an incoming call received through a forward channel, for forming an audio conversion channel among the received radio-frequency electromagnetic signals to output the demodulated signal, and for modulating and transmitting a signal on a reverse channel;

15 a TV control section for supplying the tuning signal corresponding to a channel selection command signal to the TV module, the TV control section synchronizing On Screen Display (OSD) data such as a font, a graphic etc., corresponding to display control data and display data such as an icon, with the composite synchronizing signal to output the synchronized signal as a video
20 signal;

 a Mobile Station Processor, (hereinafter, referred to as "MSP") for establishing a phone mode/TV mode in response to an input command, generating a channel selection command signal stored in a predetermined memory area by setting the TV mode, supplying the display control data to the
25 TV control section according to a preset incoming call alarm mode when

receiving an incoming signal from the MRFU or interrupting a power supply voltage supplied to the TV module, and processing audio data outputted from the MRFU to output the processed audio data signal while supplying audio data to the MRFU; and

5 a display unit for synchronizing the composite video signal and graphic video signal outputted from the TV module and the TV control section with the composite synchronizing signal and displaying the synchronized composite video signal and graphic video signal on a image viewing screen.

10 An alarm mode of an incoming call of the TV phone constructed in accordance with the preferred embodiment of the present invention includes a first incoming call alarm mode for interrupting a power supply and switching the operational mode from the TV mode to the phone mode; a second incoming call alarm mode for switching the TV audio outputted from the TV module; and a
15 third incoming call alarm mode for displaying an incoming call character message or a preset graphic at a specific region on a TV image displaying screen. The MSP is adapted to selectively control output of the audio signal and the video signal by controlling the TV tuner and the TV control section based on a preset incoming call alarm mode in response to an incoming call, or control
20 the OSD to allow the incoming call character message to be displayed at a specific region on the TV image displaying screen.

These first to third incoming call modes represent a bell mode, a vibration mode, and a lamp mode, respectively, when the operational mode of the TV phone is in TV mode, and are switched from the TV mode to a phone mode.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram illustrating the construction of a TV phone according to a preferred embodiment of the present invention;

FIG. 2 is a flowchart illustrating the process of displaying an incoming call message of the TV phone according to a preferred embodiment of the present invention; and

FIGs. 3a and 3b are schematic views illustrating a state in which the incoming call message is displayed on a screen of a display unit of the TV phone according to a preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Reference will now be made in greater detail to the preferred embodiment of the present invention. In the following description of the present invention, only portions necessary for understanding the operation of the present invention are set forth, and a detailed description of known functions and configurations incorporated herein will be omitted when it may obscure the subject matter of the present invention.

FIG. 1 is a block diagram illustrating the inner construction of a TV phone according to a preferred embodiment of the present invention.

In FIG. 1, reference numeral 18 designates the MRFU, reference numeral 20 designates the MSP, and reference numeral 30 designates a keypad of the portable phone module. These components are incorporated in circuits applied to conventional portable digital cellular phones, such as CDMA type portable cellular phone, to implement the preferred embodiment of the present invention. The constructions and operations of the above components will be apparently understood by reference to the following detailed description.

Also, reference numeral 14 designates a radio frequency switch (RFSW), reference numeral 16 designates the TV module, reference numeral 22 designates the TV control section, reference numeral 24 designates an LCD driver (LCDD), and reference numeral 26 designates the TFT-LCD. Since generally the TFT-LCD cannot receive a composite video signal and display an image by itself, the LCDD separates the brightness signal, color signal, and synchronizing signal from the composite video signal, makes an R/G/B signal, and then outputs them in synchronization with the synchronizing signal.

The RFSW 14 has a circuit for switching an antenna 12 connected to a common terminal COM to both a first port P1 and a second port P2 or only to the second port P2.

That is, the RFSW 14 includes a first port P1 connected to the TV module 16 and a second port P2 connected to the MRFU 18. The RFSW 14 connects the second port P2 to the antenna 12 in response to an input of a control signal IDLE in a logic "low" state, or connects the first port P1 and the

second port P2 to the antenna 12 in response to an input of a control signal IDLE in a logic “high” state. The RFSW 14 is provided with a circuit for not allowing a radio frequency signal inputted to the second port P2 to be applied to the first port P1.

5 The TV module 16 operates by an input of a power supply voltage V_{cc} supplied upon the “turning on” of a switch 31. The TV module 16 includes a tuner 32 for selecting only the TV channel signal corresponding to the input of a tuning signal CH-S among signals outputted from the first port P1 to down-convert the TV channel signal to an intermediate frequency signal IF, and a demodulator 36 for demodulating the intermediate frequency signal IF outputted from the tuner 32 to output a composite video signal CV, a composite synchronizing signal CSYNC and an audio signal AO2. The tuner 32 includes a Phase-Locked Loop (PLL) 34 for generating an associated tuning frequency in response to an input of the tuning signal CH-S, determining whether or not a phase is locked to the generated tuning signal, and outputting a receiving state signal RSS corresponding to a receiving field strength of the TV channel signal received.

20 The TV control section 22 includes a flash memory (FRAM) 38 for storing program data for controlling the TV module 16, font data and graphic data, such as an icon; a video memory (VRAM) 40 for storing text data and graphic data under control of the OSD in order to output the data as display images; a display control section 42 for inputting and analyzing data in response to an input of an interrupt signal INT, accessing the flash memory 38 and outputting the tuning signal TS, the text data and the graphic data corresponding

to the analysis of the data from the flash memory 38, and controlling the tuning operation according to the receiving state signal RSS outputted from the TV module 16; an OSD processor 44 disposed between the MSP 20 and the display control section 42, for interfacing data therebetween and synchronizing the display related data outputted from the display control section 42 with a vertical synchronizing (VS) signal and horizontal synchronizing (HS) signal outputted from the LCDD 24 to output the synchronized display related data as display images through the video memory 40. The display control section 42 has an 8 bit-microprocessor unit MPU of one chip and a universal synchronous/asynchronous receiver/transmitter (UART) for communication of data included therein. Further, the OSD processor 44 includes a timing generator for generating a composite synchronizing signal, and a latch register for temporarily storing data, etc. The composite synchronizing signal is used when displaying the OSD data associated with the phone mode on the TFT-LCD 26 in a state in which the TV module is disabled.

Now, operations of the TV phone according to the preferred embodiment of the present invention will be described in detail hereinafter with reference to FIG. 1.

First of all, suppose that the operational mode of the TV phone, as shown in FIG. 1, is set to the TV mode and one among the first, second and third incoming alarm modes is set as the alarm mode for an incoming call on the TV phone. For example, suppose that at least one among three incoming call alarm modes is set as the incoming call alarm mode. As stated above, the first incoming call alarm mode interrupts the power supply of the TV and switches

the operational mode from the TV mode to the phone mode; the second incoming call alarm mode switches the TV audio outputted from the TV module; and the third incoming call alarm mode displays an incoming call character message or a preset graphic at a specific region on the TV image displaying screen. The incoming call alarm mode is set by using the keypad 30 as shown in FIG. 1. For example, the first incoming call alarm mode is a phone mode, the second incoming call alarm mode is a bell mode, and the third incoming call alarm mode is a mute or lamp mode, and these incoming call alarm modes are set by using the keypad.

As shown in FIG. 1, a radio-frequency, electromagnetic signal is received by an antenna 12 which converts the radio-frequency, electromagnetic signal into an electrical signal which is supplied to a common terminal COM of an RFSW 14. The RFSW 14 allows the common terminal COM to be connected to both the first port P1 and the second port P2 or to be connected only to the second port P2 based on the logic level of a control signal outputted from the MSP 20. For example, when the operational mode of the TV phone is set to the TV mode, the MSP 20 enables the power supply control signal TVCTL to “turn on” switch 31 and makes the control signal IDLE become a logic “high” state. By this operation, when switch 31 is turned on, the TV module 16 is supplied with a power supply voltage V_{cc} so that it is in an operable state.

In such a state, the MSP 20 supplies the OSD processor 44 in the TV control section 22 with a channel selection command signal CHS. The user may select a channel by inputting from the keypad 30. The OSD processor 44 stores the channel selection command signal CHS inputted from the MSP 20 in

a latch register 46 and generates an interrupt signal INT. In response to activation of the interrupt signal INT, the display control section 42 reads out data stored in the latch register 46 and analyzes if the interrupt signal INT is a command or general data. Determining whether a specific address bit or data bit transmitted from the MSP 20 is set performs this analysis. Meanwhile, the display control section 42 outputs a response signal ACK in response to the interrupt signal INT in order to release the interrupt of the OSD processor 44. By release of this interrupt, the OSD processor 44 sets the state of its latch register 46 to a free state.

By this operation, if the display control section 42 determines that data inputted from the OSD processor 44 is the channel selection command signal CHS, it accesses the flash memory 38 and outputs a tuning signal TS, which corresponds to the channel selection command signal CHS, from the flash memory 38 for application to the PLL 34 of the tuner 32 disposed in the TV module 16.

The PLL 32 in the TV module 16 oscillates a tuning frequency corresponding to the tuning signal for application to the TV tuner 32, which down-converts the corresponding TV channel signal among the radio-frequency electromagnetic signals outputted from the first port P1 of the RFSW 14 to an intermediate frequency signal IF for application to the demodulator 36.

The demodulator 36 connected to the tuner 32 is adapted to demodulate the intermediate frequency signal IF to output a composite video signal CV, a composite synchronizing signal CSYNC, and audio signal AO2 of the

corresponding channel. The audio signal AO2 outputted from the demodulator 36 is reproduced either through an earphone (not shown) or a speaker (not shown), which is turned on by switch 33. At this time, the PLL 34 of the tuner 32 monitors that an oscillating frequency of a voltage controlled oscillator VCO is locked, and measures the receiving field strength of the selected channel to supply the receiving state signal RSS corresponding to the measured field strength to the display control section 42. The display control section 42 allows for an automatic channel search by using the voltage level of the receiving state signal RSS.

Meanwhile, the LCDD 24 allows an NTSC decoder included therein to separate the analog composite video signal CV into a color signal of R, G, and B, and synchronizes the separated color signal of R, G, and B with the composite synchronizing signal CSYNC for application to the TFT-LCD 26, which displays the synchronized color signal on a screen thereof. Also, the LCDD 24 synchronizes and separates the input composite synchronizing signal CSYNC to output a vertical synchronizing signal VS and a horizontal synchronizing signal HS. Therefore, when the operational mode of the TV phone is set to the TV mode, TV images are displayed on the screen of the TFT-LCD 26 while an audio signal AO2 is outputted under the control of the MSP 20.

Meanwhile, the MRFU 18 coupled to the antenna 12 through port P2 or RFSW 14 receives a radio-frequency, electromagnetic signal of a transmitting/receiving frequency bandwidth for a portable phone, converts an analog signal into a digital signal or converts a digital signal into an analog

signal, and power-amplifies the converted signal to transmit it through the antenna 12. The MRFU 18 can be easily constructed by combining an RF unit and a baseband analog (BBA) circuit of a conventional portable phone. For example, the MRFU 18 can be embodied by combining a CDMA type radio transceiver unit, a chip of "BBA2.X(Q5312CDMA)" manufactured by

5 QUALCOMM Co. as a BBA circuit for converting an analog signal into a CDMA type digital data and vice versa, and an RF unit. The RFSW 14 allows the common terminal COM to be connected to the second port P2 under the control of the MSP 20 as described above when the operational mode of the MRFU 18 is set either in wait mode or transmitting/receiving mode.

The MSP 20 coupled to the MRFU 18 analyzes commands supplied from the keypad 30 and generates control signals corresponding to the commands. Further, the MSP 20 performs or controls data signal processing operations such as demodulating, de-interleaving, decoding, and vocoding of

15 the digital signal inputted thereto from the MRFU 18 so that it outputs the received forward channel data while outputting coded audio data as reverse channel data. A codec 28 coupled to the MSP 20 converts the forward channel coded audio data to an analog audio signal to output the converted audio signal (AO1) through a speaker or earphone, or codes an analog audio signal inputted

20 thereto from a microphone (AIN) to supply the coded audio signal as an audio signal of a reverse channel to the MSP 20.

In addition, the MSP 30 informs a user watching a TV program of an incoming call by controlling the incoming call modes as shown in FIG. 3a and 3b through analysis of the incoming call alarm modes set in an inner memory if the

received forward channel data message is a message associated with an incoming call. The MSP 30 may selectively use "MSM2300" of a one-chip type supplied from QUALCOMM Co. in U.S.A. and one of chips for executing the same function as that of the "MSM2300" chip.

5 FIG. 2 is a flowchart illustrating the process of indicating an incoming call message on a TV phone according to a preferred embodiment of the present invention, in which a user is informed of an incoming call state upon the reception of an incoming call message while in the TV mode. A program for the flowchart is stored in a memory block of the MSP 30 as shown in FIG. 1.

10 A call alarm operation in TV mode upon the occurrence of an incoming call will be described in detail hereinafter with reference to FIG. 2 and FIGs. 3a and 3b.

15 Referring now to FIG. 2, in TV mode where a user watches the TV program of a desired channel on the TV phone, the MSP 20 monitors an output of the MRFU 18 at predetermined time intervals to determine at step 102 whether or not any incoming call message has been received. If it is determined at step 102 that no incoming call or message has been received, the MSP 20 continues to operate in TV mode.

20 On the other hand, if it is determined at step 102 that the MRFU 18 has received incoming call or message, the program proceeds to step 104 at which the MSP 30 detects the incoming call alarm modes set in the memory therein. The incoming call alarm modes herein means the above-mentioned first, second

and third incoming call alarm modes. The MSP 20 determines at steps 106, 110 and 114 of FIG. 2 whether or not the present incoming call mode is any one of the first to third incoming call modes. If it is determined at step 106 that the present incoming call mode is the first incoming call mode (i.e., a bell mode), the program proceeds to step 108, where the MSP 20 disables the power supply control signal TVCTL supplied to the switch 31 so that it interrupts the power supply voltage supplied to the TV module 16, and turns the control signal IDLE supplied to the RFSW 14 to the logic "low" state, which allows the antenna 12 to be disconnected from the first port P1 of the RFSW 14. In this call alarm mode, a telephone bell is driven by the incoming call. And then, if it is determined at step 120 that the user wishes to respond to the incoming call, the program proceeds to step 122 in which the MSP 20 transmits a response message through a reverse channel.

If it is determined at step 110 that the present incoming call alarm mode is the second incoming call alarm mode (i.e., a vibration mode), the program proceeds to step 112 at which the MSP 20 switches the switch 33 connected to an audio output node of the demodulator 36 at predetermined intervals to switch an output of a TV audio signal. For example, the audio output could be turned on and then off every half second. Therefore, when an incoming call mode is set to the second incoming call mode, an audio signal is intermittently cut off while the TV image continues to be outputted, thereby audibly informing the user viewing the TV program of an incoming call state.

If it is determined at steps 106 and 110 that the present incoming call mode is not set to the first or second incoming call mode, the program proceeds

and the MSP 20 decides that it is in the third incoming call alarm mode. Within the third incoming call alarm mode, there are two different modes of display: text and graphic image. FIGs. 3a and 3b illustrate schematically examples of displaying an incoming call message on a viewing screen of a display unit of the TV phone according to a preferred embodiment of the present invention. FIG. 3a illustrates a character message, signifying an incoming call, displayed on a specific region of a viewing screen of the display unit, for example, at the lower end portion. FIG. 3b illustrates a preset graphic image including an image character message of "you're wanted on the phone" displayed on the entire portion of the viewing screen thereof.

At step 114, the MSP 20 determines whether or not the present incoming call mode is set to the text mode. The text mode displays an incoming call message at the lower end portion of the viewing screen like the oblique line shown in FIG. 3a. If it is determined at step 114 that the third incoming call alarm mode is set to text mode, the program proceeds to step 116 where the MSP 20 supplies the OSD processor 44 with a control signal signifying a text. In response, the OSD processor 44 generates the interrupt signal INT for application to the display control section 42. The display control section 42 analyzes the control signal signifying a text stored in the latch register 46 of the OSD processor 44 and accesses the flash memory 38 to allow the flash memory 38 to output text data corresponding to the text signifying control signal for application to the OSD processor 44. The processor 44 stores the text data inputted thereto from the display control section 42 in the video memory 40. Also, the OSD processor 44 synchronizes the text data stored in the video memory 40 with the composite synchronizing signal CSYNC to output the

synchronized text signal as a video signal of RGB at the lower end portion of a horizontal line. The LCDD 24, which is coupled to the OSD processor 44, supplies the video signal of RGB outputted from the OSD processor 44 to the TFT-LCD 26, which displays the video signal at the lower end portion of a image viewing screen as shown in FIG. 3a.

It should be noted that the display control section 42 and the OSD processor 44 controls the text data so that they can be displayed at the lower end portion of a field or a frame as described above. In addition, it is preferable that the text data is an image character message of "you're wanted on the phone". The oblique line portion as shown in FIG. 3a is a region on which any message notifying the viewer of an incoming call is displayed, and the remaining portion, except the oblique line portion, is a region on which the TV image is displayed.

If, on the other hand, it is determined at step 114 that the third incoming call alarm mode is not set to the text mode, the program proceeds to step 118 where the MSP 20 transmits a graphic data displaying command to the display control section 42 through the OSD processor 44. The display control section 42 accesses the flash memory 38 and directs the flash memory 38 to output the graphic data for displaying an incoming call graphic to the OSD processor 44, which stores the inputted graphic data in the video memory 40. The OSD processor 44 synchronizes the graphic data stored in the video memory 40 with the composite synchronizing signal CSYNC to output the synchronized signal as a video signal of RGB at the lower end portion of a horizontal line. The LCDD 24, which is coupled to the OSD processor 44, supplies the video signal of RGB

outputted from the OSD processor 44 to the TFT-LCD 26, which displays the TV image with the graphic data superimposed on top. The image viewing screen with the superimposed graphic data is as shown in FIG. 3b.

Accordingly, it can be seen that if the incoming call alarm mode is set to the third incoming call mode, either a character message signifying the incoming call or images signifying there is an incoming call, such as the combination of the telephone graphic and the character message of "you're wanted on the phone", is displayed either at the lower end portion of the image viewing screen or the entire portion of the image viewing screen, thereby informing a user of an incoming call state, even while the TV audio sound is continually reproduced and outputted.

At subsequent step 120, the MSP 20 determines whether or not the user responds to the incoming call. This can be implemented by detecting if a signal corresponding to the input of the SEND key on the keypad 30 is generated. For a flip type portable phone, the user's response to the incoming call can be detected through the opening of the flip of the portable phone. If it is determined at step 120 that the user responds to the incoming call, the program proceeds to step 122 where the MSP 20 transmits an incoming call response message through the MRFU 16 to a base station in order to enter the phone mode. On the other hand, if it is determined at step 120 that the user does not respond to the incoming call, the operation mode of the TV phone remains in TV mode.

As apparent from the above description, the TV phone of the present invention provides many advantages. When in TV mode, a user can be

informed of an incoming call by stopping the operation of a TV module;
switching off and on output of an audio signal of the selected TV broadcasting
channel; displaying a character message at the lower end portion of the TV
viewing screen; or superimposing a graphic image over the image on the TV
5 viewing screen, thereby accurately informing the user that a call has been
received and allowing the user to rapidly answer the telephone.

While this invention has been described in connection with what is
presently considered to be the most practical and preferred embodiment, it is to
be understood that the invention is not limited to the disclosed embodiment, but,
10 on the contrary, it is intended to cover various modifications within the spirit and
scope of the appended claims.

WHAT IS CLAIMED IS:

1. A TV phone in which a television and a portable cellular phone are integrally combined, the TV phone comprising:

a TV module for receiving and demodulating a desired TV channel signal among radio-frequency electromagnetic signals received in response to an input of a tuning signal, when the TV module operates by supply of a power supply voltage, to generate a composite video signal, a composite synchronizing signal and a composite audio signal;

a Mobile Station Radio Frequency Unit (MRFU) for demodulating a signal indicative of an incoming call received through a forward channel, forming an audio conversion channel among the received radio-frequency electromagnetic signals to output the demodulated signal, and modulating and transmitting a signal in a reverse channel;

a TV control section for supplying the tuning signal corresponding to a channel selection command signal to the TV module, synchronizing On Screen Display (OSD) data corresponding to display control data and display data with the composite synchronizing signal to output the synchronized signal as a video signal;

a Mobile Station Processor (MSP) for establishing a phone or TV mode in response to an input command, generating the channel selection command signal stored in a predetermined memory area by setting the TV mode, supplying the display control data to the TV control section or interrupting a power supply voltage supplied to the TV module according to a preset incoming call alarm mode when receiving an incoming signal from the MRFU, and processing audio data outputted from the MRFU to output the processed audio

data signal while supplying audio data to the MRFU; and

a display unit for synchronizing the composite video signal from the TV module and the video signal from the TV control section with the composite synchronizing signal and displaying the synchronized composite video signal and the video signal on an image viewing screen.

2. The TV phone recited in claim 1 further comprising a power switch disposed between the TV module and a power supply unit, the power switch being switched under the control of the MSP to turn on/off the TV module.

3. The TV phone recited in claim 2 further comprising an antenna for receiving or transmitting a radio-frequency, electromagnetic signal; and a Radio Frequency Switch (RFSW) disposed between the TV module and the MRFU, the RFSW allowing the antenna to be connected to both the TV module and the MRFU in response to the establishment of the TV mode of the MSP, and allowing the antenna to be connected to only the MRFU in response to the establishment of the phone mode of the MSP.

4. The TV phone recited in claim 3, wherein in the TV mode allowing for viewing of a TV image, an incoming call alarm mode of the TV phone in the MSP upon reception of an incoming call comprises interrupting a power supply voltage supplied to the TV module and switching from the TV mode to the phone mode.

5. The TV phone recited in claim 3, wherein in the TV mode

allowing for reviewing of a TV image, an incoming call alarm mode of the TV phone in the MSP upon reception of an incoming call comprises switching off and on, at a predetermined interval, only the audio signal outputted from the TV module.

5

6. The TV phone recited in claim 3, wherein in the TV mode allowing for reviewing of a TV image, an incoming call alarm mode of the TV phone in the MSP upon reception of an incoming call comprises displaying an incoming call character message or a preset graphic message at a specific region or an entire portion of a TV image viewing screen.

10


7. The TV phone recited in claim 3, wherein the MSP selectively controls at least one of the power switch, an audio outputting switch and the TV control section based on a preset incoming call alarm mode in response to reception of an incoming call.

15

ABSTRACT

A TV phone in which a television and a portable cellular phone are integrally combined, comprising: a TV module for receiving and demodulating a desired TV channel signal to generate a composite video signal, a composite synchronizing signal and a composite audio signal; a mobile station radio frequency unit (MRFU) for demodulating a signal indicative of an incoming call received through a forward channel, forming an audio channel to output the demodulated signal, and modulating and transmitting a signal on a reverse channel; a TV control section for supplying a tuning signal to the TV module, synchronizing on screen display (OSD) data such as a graphic with the composite synchronizing signal to output a video signal; a mobile station processor (MSP) for establishing a phone or TV mode, generating a channel selection command signal, supplying display control data to the TV control section or interrupting a power supply voltage supplied to the TV module according to a preset incoming call alarm mode when receiving an incoming signal from the MRFU, and processing audio data outputted from and inputted to the MRFU; and a display unit for synchronizing the composite video signal and the video signal outputted with the composite synchronizing signal to display the synchronized signal on an image viewing screen.

FIG. 1

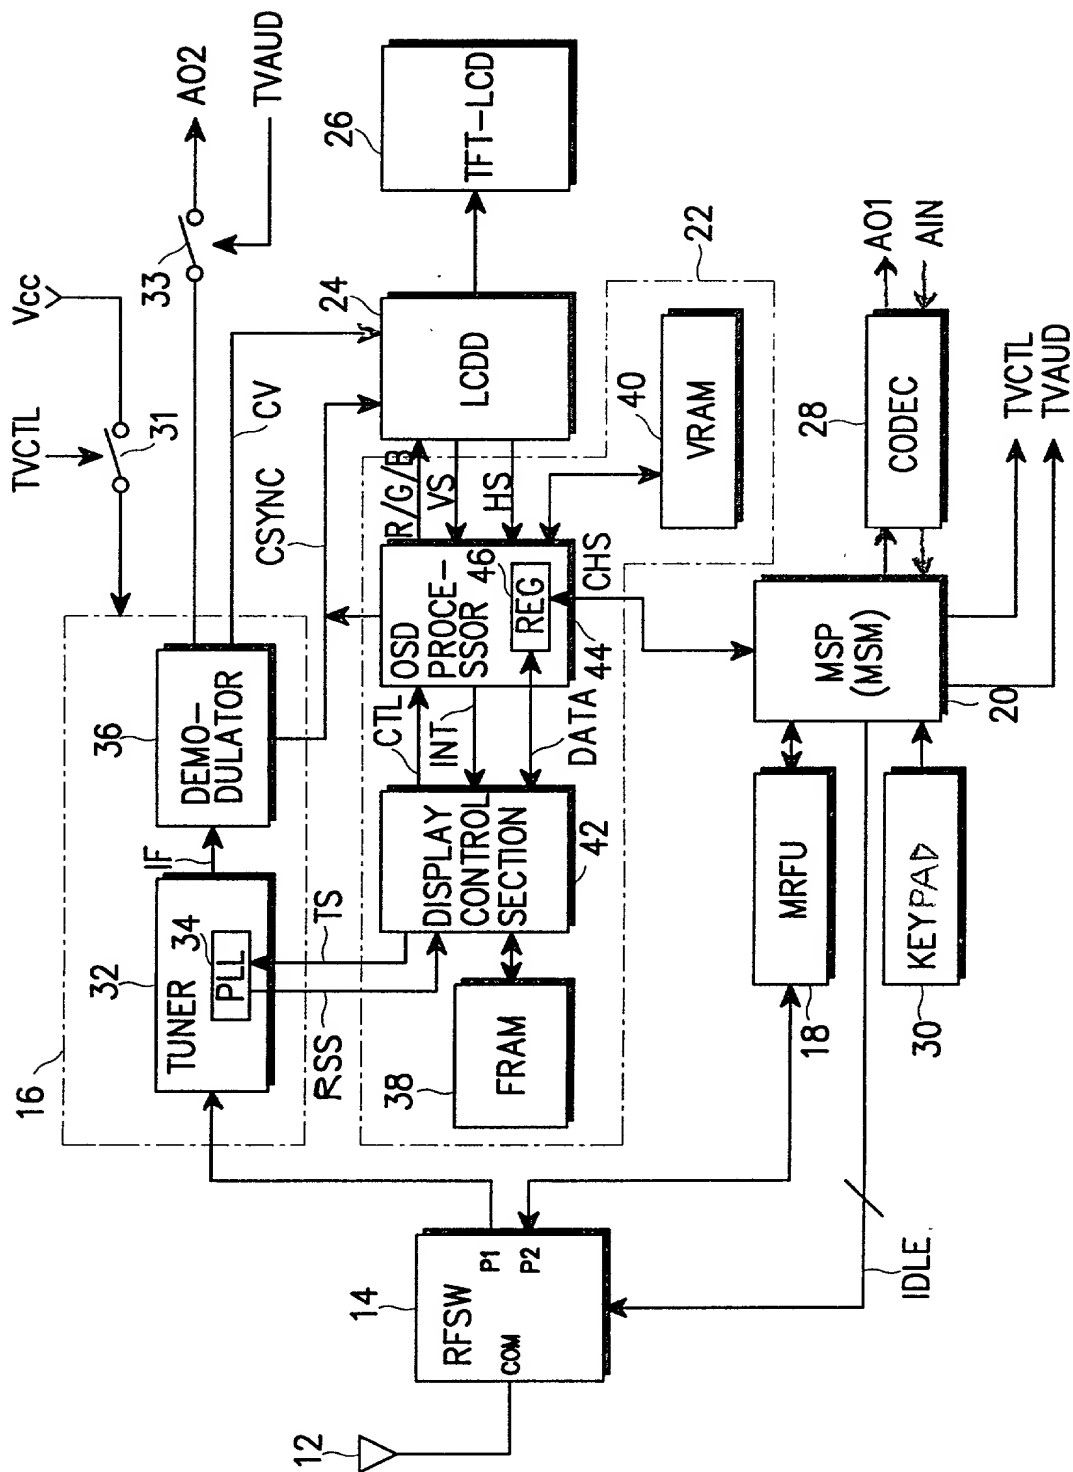

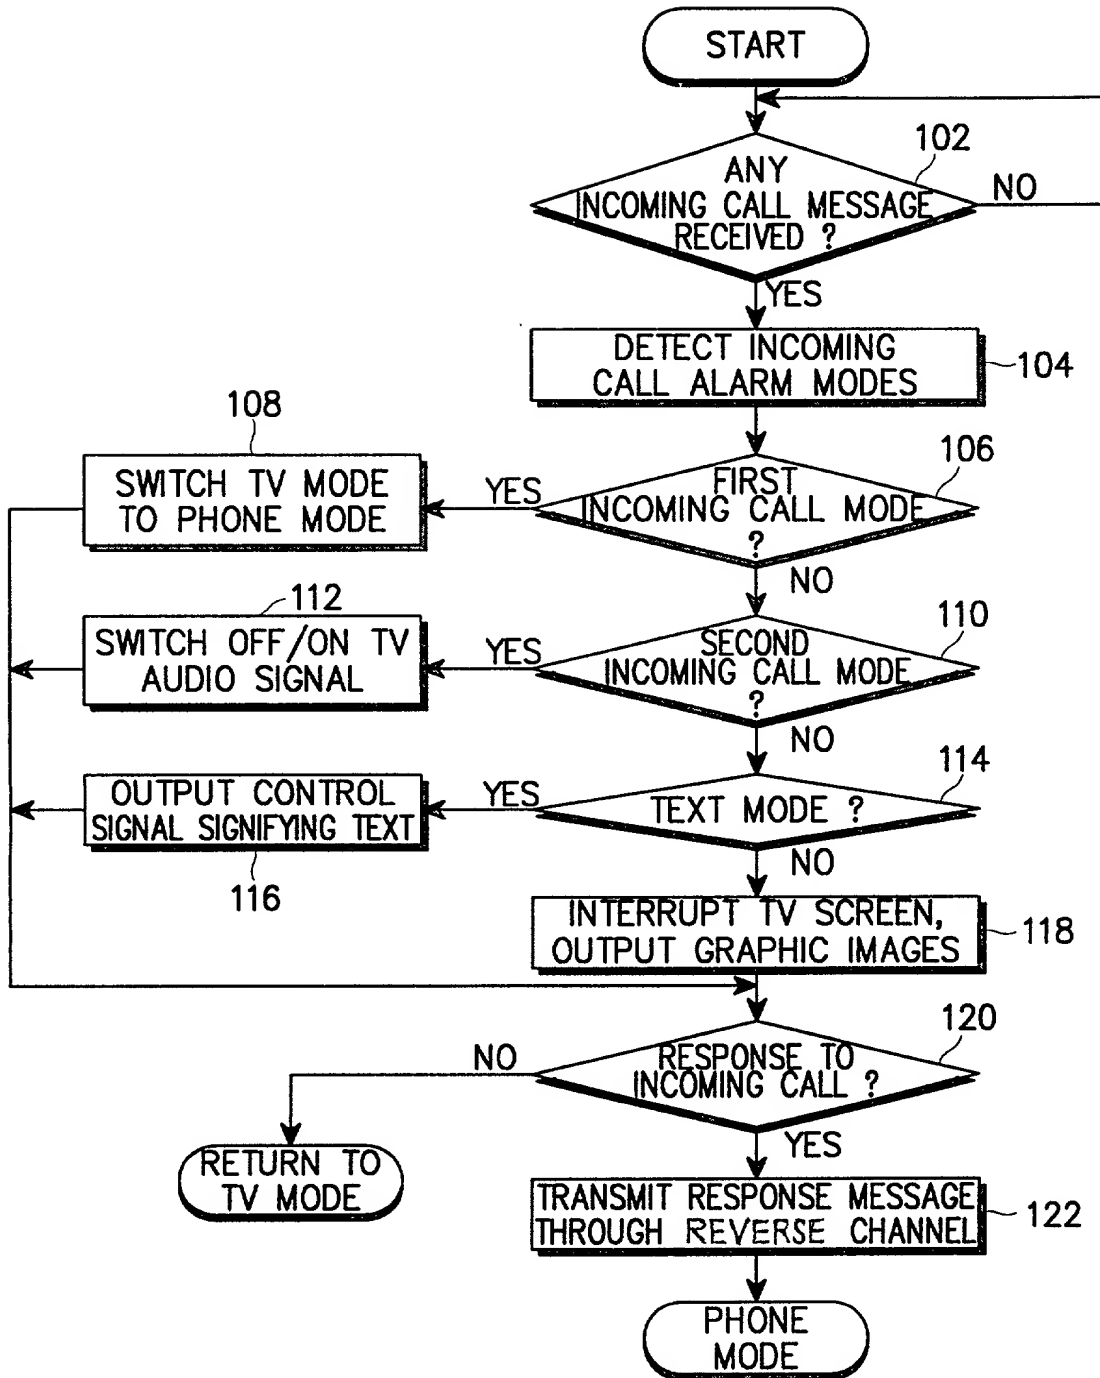


FIG. 2

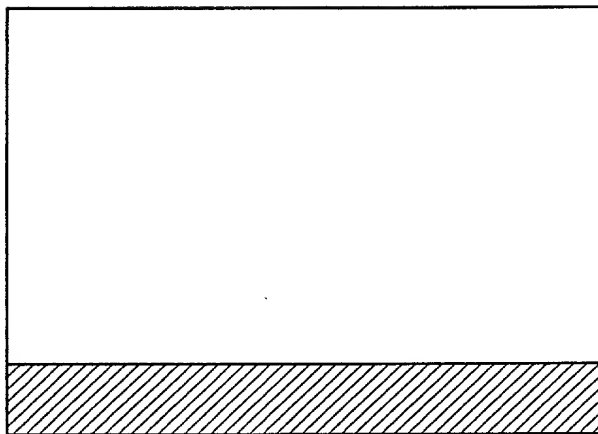


FIG. 3A

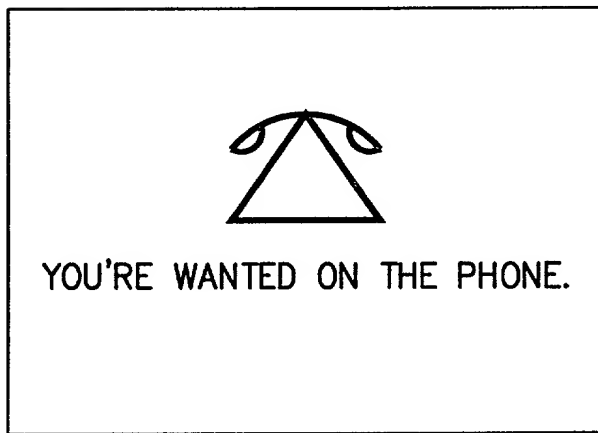


FIG. 3B

PTO/SB/01 (6/95)

DECLARATION

Docket No. 678-405 (P8985)

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and solo (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: : PORTABLE TELEVISION (TV) PHONE AND METHOD FOR CONTROLLING OPERATION THEREOF
the specification of which either is attached hereto or indicates an attorney docket no. 678-405 (P8985) or:

☐ was filed in the U.S. Patent & Trademark Office on _____ and assigned Serial No. _____,
☐ and (if applicable) was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, or §119(a) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

			Priority Claimed:
1998-56487 (Application Number)	Korea (Country)	19/12/1998 (Day/Month/Year filed)	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
1999-54007 (Application Number)	Korea (Country)	30/11/1999 (Day/Month/Year filed)	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)

I hereby appoint the following attorneys: PETER B. DILWORTH, Reg. No. 26,450; ROCCO S. BARRESE, Reg. No. 26,253; DAVID M. CARTER, Reg. No. 30,949; PAUL J. FARRELL, Reg. No. 33,494; PETER DELUCA, Reg. No. 32,978; JEFFREY S. STEEN, Reg. No. 32,063; ADRIAN T. CALDERONE, Reg. No. 31,746; GEORGE M. KAPLAN, Reg. No. 28,375; JOSEPH W. SCHMIDT, Reg. No. 36,920; RAYMOND E. FARRELL, Reg. No. 34,816; RUSSELL R. KASSNER, Reg. No. 36,183; CHRISTOPHER G. TRAINOR, Reg. No. 39,517; GEORGE LIKOUREZOS, Reg. No. 40,067; JAMES M. LOCITLER, Reg. No. 37,070; EDWARD C. MEAGHER, Reg. No. 41,189; SUSAN L. HESS, Reg. No. 37,350; MICHAEL P. DILWORTH, Reg. No. 37,311; PETER B. SORELL, Reg. No. 44,349, and GLENN D. SMITH, Reg. No. 42,156, each of them of DILWORTH & BARRESE, 333 Earle Livingston Boulevard, Uniondale, New York 11553 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Page 1 of 2

Paul J. Farrell, Esq.
DILWORTH & BARRESE
333 Earle Ovington Boulevard
Uniondale, New York 11553
Tel. No.: (516) 228-8484

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Dae-Heon KWON Citizenship Korea

Inventor's signature: Dae-Heon KWON Date: December 20, 1999
Residence & Post Office Address: Hwajin Gaumbongtown #103-508, Inpyong-ri, Puksam-myon, Chilgok-gun, Kyongsangbuk-do, Korea

FULL NAME OF SECOND JOINT INVENTOR: Yang-Muk KANG Citizenship Korea

Inventor's signature: Yang-Muk KANG Date: December 20, 1999
Residence & Post Office Address: 244, Haepyong-ri, Haepyong-myon, Kumi-shi, Kyongsangbuk-do, Korea

FULL NAME OF THIRD JOINT INVENTOR: Won-Seok KANG Citizenship Korea

Inventor's signature: Won Seok Kang Date: December 20, 1999
Residence & Post Office Address: 37, Songjong-dong, Kumi-shi, Kyongsangbuk-do, Korea

FULL NAME OF FOURTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF FIFTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF SIXTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____